



IC 1, 4, 5, 6	4011
IC 2, 3	4027
T1, T2, T3	BC546B
D1, D2, D3	1N4148
Bat1	4 x AA/LR6

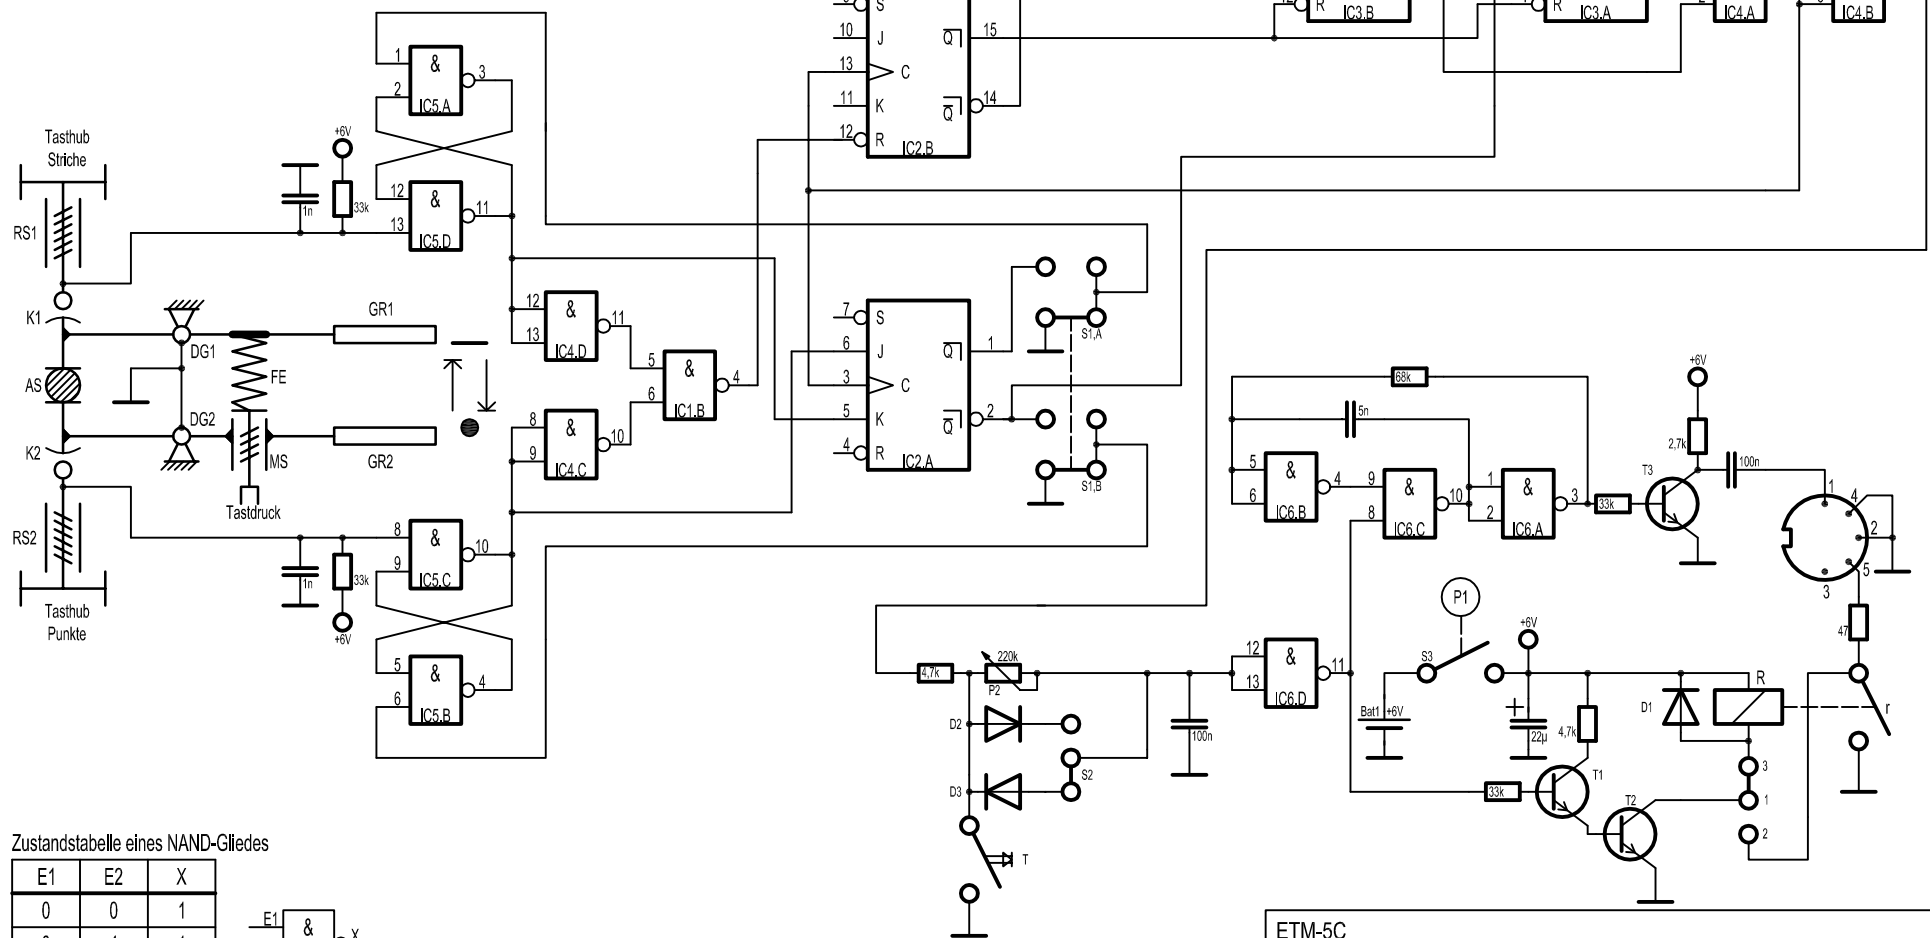

Zustandstabelle eines NAND-Gliedes

E1	E2	X
0	0	1
0	1	1
1	0	1
1	1	0



Eine "0" an E1 und/oder E2 bewirkt eine "1" am Ausgang X.

ETM-5C
gezeichnet: DF8W
Stand: 15.02.2010